


GALA KRAFT BACK

Coated Folding Box Board Kraft Back

Gsm	Thickness	Stiffness (Taber 15°)		COBB		Brightness	Moisture
	(mm)	CD	MD	Top	Back	TOP	
Tolerance	± 5%	± 10%	± 10%	G / m2	G / m2	± 2%	± 1,5%
180*	0,280	2,7	5,5	25-45	50-80	81	7,5%
200	0,315	3,9	7,8	25-45	50-80	81	7,5%
225	0,365	5,3	10,6	25-45	50-80	81	7,5%
245	0,400	6,4	12,8	25-45	50-80	81	7,5%
260	0,435	7,7	15,4	25-45	50-80	81	7,5%
275	0,465	9,3	18,6	25-45	50-80	81	7,5%
295	0,510	11,8	23,6	25-45	50-80	81	7,5%
305	0,530	12,5	25,3	25-45	50-80	81	7,5%
325	0,565	14,9	30,1	25-45	50-80	81	7,5%
345	0,615	18,3	36,8	25-45	50-80	81	7,5%
365	0,655	20,6	42,2	25-45	50-80	81	7,5%
390	0,710	24,5	51,2	25-45	50-80	81	7,5%
Standart	TAPPI 411	TAPPI 489		TAPPI 441		ISO 2470	TAPPI 412

- Test Condition (ISO) : Temp 23±1° C, relative humidity 50 ± 2 %

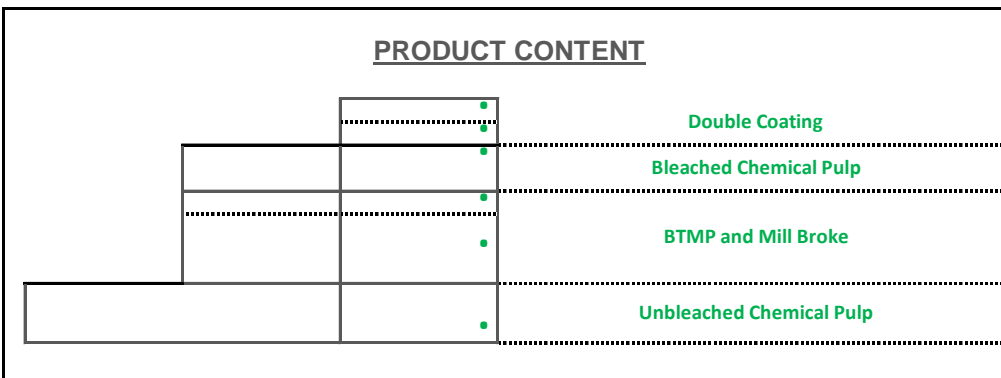

GALA KraftBack