


# GALA WHITE GC 1

*folding box board*

Gsm	Thickness	Stiffness (Taber 15°)		Brightness		Ply Bonding	Moisture	Gloss 75°
	(mm)	CD	MD	TOP	BACK			
Tolerance	± 5%	± 10%	± 10%	± 1%	± 1%	± 5	± 1,5%	± 5
215	0,31	2,8	5,6	87	84	96	8%	40
235	0,34	4,0	8,0	87	84	96	8%	40
250	0,39	5,7	11,4	87	84	96	8%	40
265	0,42	7,2	14,5	87	84	96	8%	40
290	0,46	9,6	19,2	87	84	96	8%	40
310	0,50	11,3	23,6	87	84	96	8%	40
340	0,55	14,2	30,8	87	84	96	8%	40
370	0,60	17,2	38,6	87	84	96	8%	40
400	0,65	20,5	46,5	87	84	96	8%	40
Standart	TAPPI 411	TAPPI 489		ISO 2470		TAPPI 422	TAPPI 412	TAPPI 480

- Test Condition (ISO) : Temp 23±1° C, relative humidity 50 ± 2 %

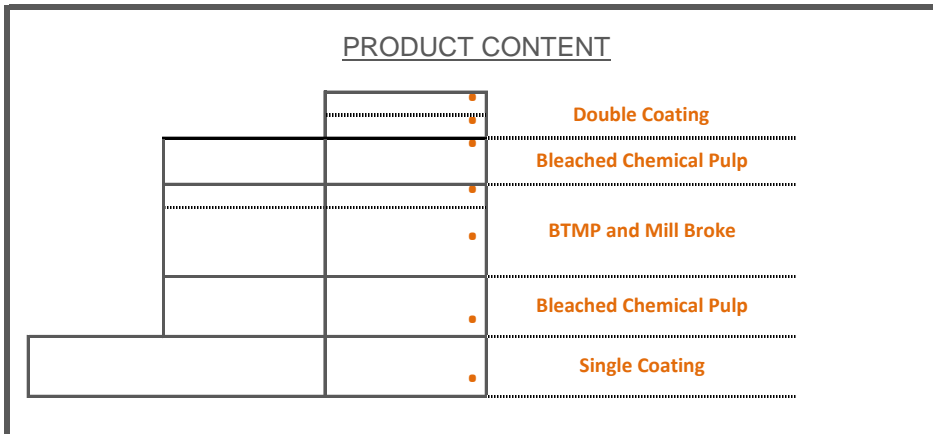

GALA WHITE