

# Product sheet

# Tako

## Tako CX Lite

### PRODUCT DESCRIPTION

Fully coated paperboard


### MAIN END USES

Cigarettes

### FEATURES

Printing methods Gravure, Sheet-fed offset  
Mill Metsä Board Tako, Metsä Board Kyro

### STRUCTURE

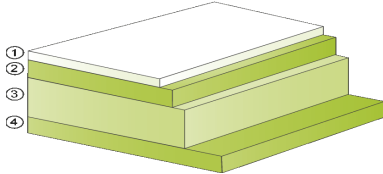

- 1) Multiple blade coating
- 2) Bleached chemical pulp
- 3) Chemi-thermo-mechanical pulp (CTMP)
- 4) Bleached chemical pulp

### TECHNICAL INFORMATION

PROPERTY, UNIT	METHOD	STANDARD	TOLERANCE			VALUES
Grammage g/m <sup>2</sup>		ISO 536	± 4%	200	215	230
Thickness mm		ISO 534	± 4%	0.305	0.330	0.350

Tolerances, when specified, are based on 95% confidence limits on single mill measurements of random samples measured in manufacturing conditions.  
No added fluorescent whitening agents (FWA). Metsä Board Paperboard mills have PEFC chain of custody, FSC chain of custody and FSC controlled wood certificates.  
Issued 01.05.2010. Supersedes sheet dated 31.08.2007 | TKCXLIN, CXL1